


INSTALLATION INSTRUCTIONS

Howard FLL7B LED Flood Light

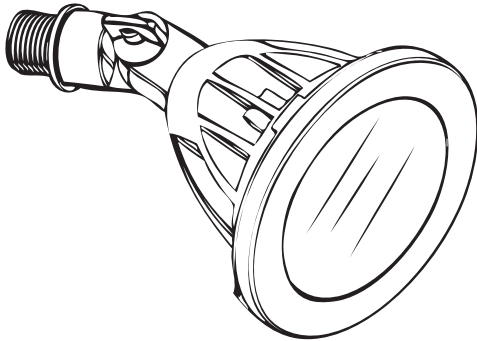

Warning

Please read instructions carefully before attempting to install fixture and retain instructions for future reference.

Caution: To avoid electrical shock hazard.

- Turn off the electricity before installing or servicing this fixture.
- Electrical connections need to comply with National Electric Code and Local Electric Code.
- The fixture should be installed by a qualified electrician.

INSTALLATION

Thread the floodlight mounting arm into the 1/2" opening of the cover and secure it with 1/2" locknut (see "Fixture Wiring")

FIXTURE WIRING

1. Connect the black fixture lead to the voltage supply lead with wire connector.
2. Connect the white fixture lead to the neutral supply lead with the wire connector.
3. Connect the green or green/yellow or bare copper ground lead to the supply ground lead with the wire connector.

To AIM FIXTURE

1. Loosen the side screw connected to the arm knuckle to aim the fixture up or down. Re-tighten screw to secure the fixture in the desired position.
2. For a rain-tight seal, caulk the aiming arm joint, top and sides of the canopy with silicone caulking compound.