

9/18/2013

Edge Lite LED Exit Sign

Features

- Energy-efficient LED technology
- Decals & template provided for chevron directional indicators
- UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

Electrical

- Dual 120V/277V voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- Maintenance-free, rechargeable Ni-Cad battery (EM model)
- Internal solid-state transfer switch automatically connects the internal battery to
- LED Board for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Illumination

- Ultra-bright, energy efficient, long-lasting Red or Green LED
- UV-stabilized ultra-clear acrylic edgelit panel provided consistent, uniform illumination

Housing

- Premium-grade, aluminum housing (also available in black or white powder coated)

Project:	
Catalog#:	
Approved by:	




Mounting


- Die-cast aluminum mounting canopy included—provides top, end or back mount convenience

Dimensions

Recessed

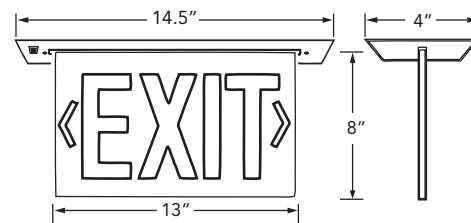

Surface

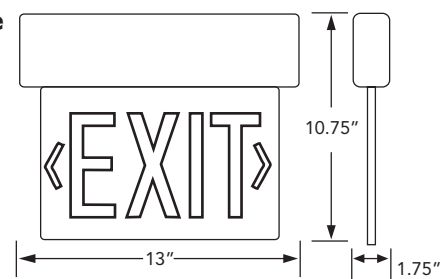

ORDERING INFORMATION

Model Family #	Mounting Style	Operation	Number of Faces	Letter Color	Housing/Trim Finish	Options
HL0203	S - Surface Mount	Blank - AC Only	1 - Single Face ¹	RC - Red on Clear ¹ GC - Green on Clear ¹	W - White B - Black	Blank - None SDT - Self-Diagnostic
	R - Recessed Mount	B - Battery Backup	2 - Double Face ²	RM - Red on Mirror ² GM - Green on Mirror ²	A - Aluminum	

Example model# HL0203 S B 1 RC A SDT

1. Clear available with single face only
2. Double face models will have mirror divider.

Specifications subject to change without notice.

