

5/22/2013

New York Approved Edge Lite LED Exit Sign

Features

- Recessed: UL Listed for damp locations (0°C - 50°C)
- Surface: UL Listed for damp locations (20°C - 50°C)
- UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

Electrical

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V Long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Typical Performance	Surface/Recessed	
Input Voltage	120	277
Input Current (A)	0.030	0.020
Input Power (W)	4.2	4.2


Illumination

- Ultra-bright, energy efficient, long-life Red LED.
- UV-stabilized, ultra-clear acrylic edgelit panel provides consistent, uniform illumination.
- Double face utilizes factory installed silver or white mylar background panel.
- NY compliant 8" Exit letters.

Housing

- Premium-grade, extruded aluminum housing.
- Extruded Aluminum trim assembly is easily detachable from below, providing accessibility for service or maintenance, also available in black or white powder-coated finishes.
- Self-adhesive Chevron appliques and guide template provided for directional indication.

Project:	
Catalog#:	
Approved by:	

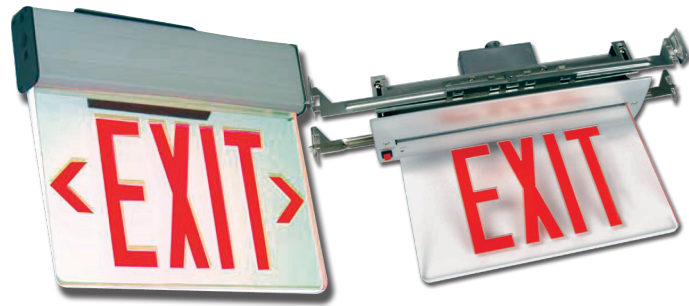


Mounting

- Recessed: Compatible with drywall or drop ceiling mount installations. Bar hangers included.
- Surface: Aluminum mounting canopy included for top, end or back mount.

Options

- SDT: Self-diagnostic test feature performs monthly, biannually, and annually tests to ensure reliable operation and to meet electrical and life safety codes.

Dimensions

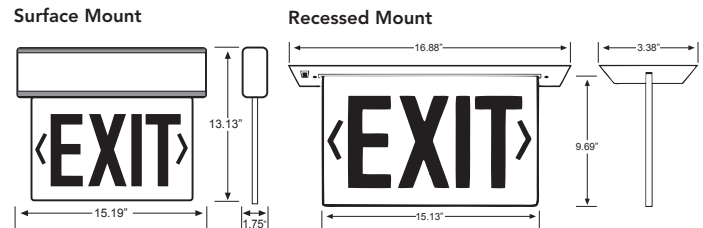

ORDERING INFORMATION

Model Family #	Mounting Style	Operation	Number of Faces	Letter Color	Panel	Housing/Trim Finish	Options
HL0203NY	S - Surface Mount	Blank - AC Only B - Battery Backup	1 - Single Face ¹	R - Red	C - Clear ¹ W - White	W - White B - Black	SDT - Self-Diagnostics
	R - Recessed Mount		2 - Double Face ²	R - Red	M - Mirror ² W - White	A - Aluminum	
Example model# HL0203NY S B 1 R C A							

1. Clear available with single face only
2. Double face models will have mirror divider.

Specifications subject to change without notice.



Exit Sign