


12/15/2011

**Self Ballasted Compact Fluorescent Lamp**


11 Watt Globe (G25)

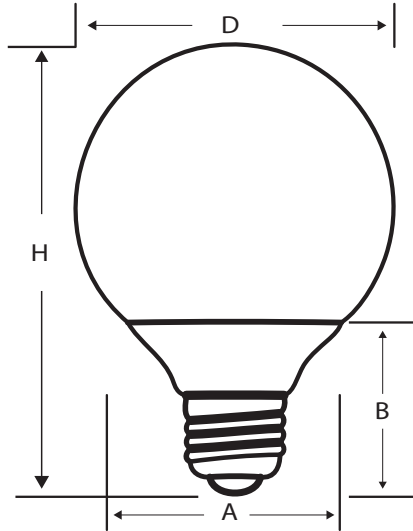


|              |  |
|--------------|--|
| Project:     |  |
| Catalog#:    |  |
| Approved by: |  |

| Ordering Information                  |               |
|---------------------------------------|---------------|
| Howard Catalog Number (Ordering Code) | CF11G25/827   |
| UPC Code                              | 799385-01978  |
| Description                           | Globe (G25)   |
| Package Quantity                      | 12/48         |
| Physical Characteristics              |               |
| Base                                  | Medium (ED26) |
| H: MOL (Maximum Overall Length) (in.) | 4.29"         |
| D: Diameter (in.)                     | 4.33"         |
| A: Base Width (in.)                   | 3.20"         |
| B: Base Height (in.)                  | 2.56"         |
| Operating Characteristics             |               |
| Lamp Watts (Nominal)                  | 11            |
| Approx. Initial Lumens                | 600           |
| Incandescent Equivalent               | 45            |
| Average Rated Life (Hours)            | 8,000         |
| Color Temperature (K)                 | 2700          |
| CRI (Color Rendering Index)           | >80           |
| Voltage                               | 110-130v      |
| Power Factor                          | >0.5          |
| Operating Position                    |               |
|                                       | Universal     |

**Typical Fluorescent Lamp Mortality**

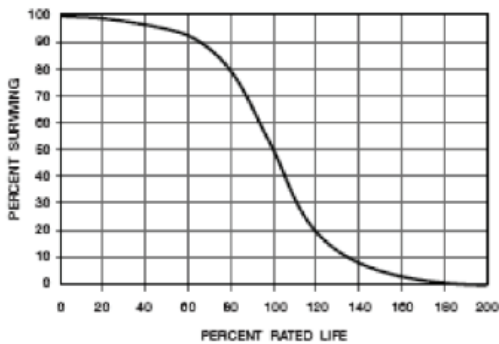

**Lumen Maintenance Curve**

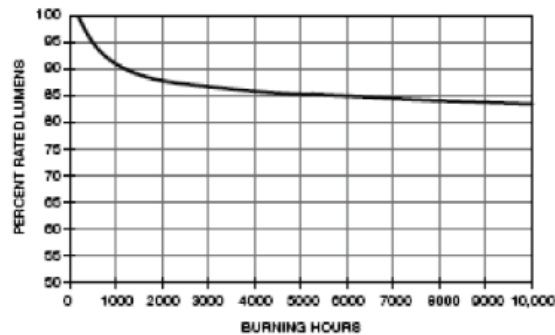

**Note:**

- Self ballasted CFL lamps cannot be installed on dimming circuits.
- Do not use in emergency exit fixtures or lights.
- For outdoor applications use only in enclosed fixtures to avoid exposure to weather.
- Do not use on electronic timers, photocells, lighted switches or any other switches that do not meet UL20 Sec. 7.6.15.
- Meets, FCC, CUL, UL and CE requirements.
- Install and remove lamp from fixture grasping plastic base.
- Use only 120v AC, 60Hz circuit.
- Never disassemble or modify lamp.
- Fully enclosed or recessed fixtures must contain proper ventilation.
- Best performance achieved when operated at 77°F/25°C.
- This product may cause interference with radios, cordless phones, televisions, and remote controls. If interferences occur, move this product away from the device and plug into a different outlet.
- Lamps contain mercury, dispose in accordance with local and state regulations.
- Warranty, this bulb is warranted for one year from date of purchase.
- Specifications subject to change. Actual results may vary.

Self Ballasted Compact Fluorescent Lamps