

10/30/2013

Die Cast Aluminum LED Exit Sign

Features

- Specification-grade, low-profile thin die-cast construction.
- Spec-grade curved faceplate
- UL listed for damp locations
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local & State Codes.

Electrical

- Dual 120V/277V voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- Maintenance-free, rechargeable Ni-Cad battery (EM model)
- Internal solid-state transfer switch automatically connects the internal battery to LEDs for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Model	Input Watts		Input Amps	
	120	277	120	277
HL0210 - Red Letters	3.2	3.6	0.031	0.019
HL0210 - Green Letters	3.8	4.4	0.033	0.017

Illumination

- Ultra-bright, energy efficient, long-lasting Red or Green LED

Housing

- Premium-grade, aluminum housing (also available in black or white powder coated)
- Easily removable chevron directional indicators
- Unique design allows double face conversion in the field
- Quick-snap face plate closure


Project:	
Catalog#:	
Approved by:	



Mounting

- Die cast mounting canopy included (provides top, end or back mount convenience)
- Universal wall mounting knockout pattern

Dimensions

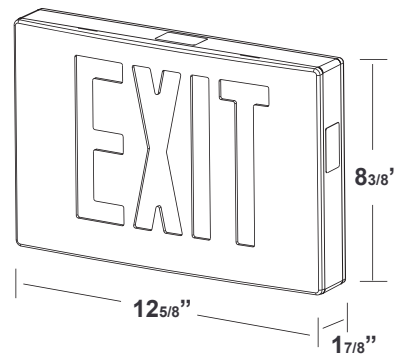

ORDERING INFORMATION

Model Family #	Operation	Number of Faces	Letter Color	Face Color	Housing Color	Options
HL0210	Blank - AC only B - Battery Backup	1 - Single Face	R - Red G - Green	BA - Brushed Aluminum B - Black W - White	BA - Brushed Aluminum B - Black W - White	SDT - Self-diagnostic 2C - Dual-circuit* TP - Tamper Proof
Example model# HL0210 B 1 R W W						

Faceplate for Double Face (must order separately)

Model Family #	Letter Color	Face Color	Faceplate
HL0210	R - Red G - Green	BA - Brushed Aluminum B - Black W - White	FP - Faceplate
Example model# HL0210 R W FP			

* Dual-circuit is available with AC Only unit. Not available with Battery Backup unit. Specifications subject to change without notice.

