

9/8/2011

**New York Approved Die Cast Aluminum LED Exit Sign**

Project:	
Catalog#:	
Approved by:	

**Features**

- Energy efficient LED technology
- NY approved spec-grade curved faceplate with 8" EXIT letters
- UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

**Electrical**

- Dual 120V/277V voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- Maintenance-free, rechargeable Ni-Cad battery
- Internal solid-state transfer switch automatically connects the internal battery to LEDs for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

**Illumination**

- Ultra-bright, energy efficient Red LED
- NY approved 8" EXIT letters

**Housing**


- Premium-grade, aluminum housing (also available in black or white powder coated)
- Spec-grade curved faceplate
- Easily removable chevron directional indicators
- Unique design allows double face conversion in the field
- Quick-snap face plate closure



**Mounting**

- Die cast aluminum housing and faceplate
- Die cast mounting canopy included (provides top, end or back mount convenience)
- Universal wall mounting knockout pattern

**Dimensions**

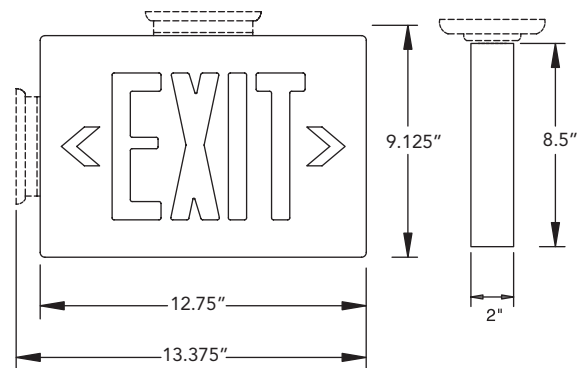

**ORDERING INFORMATION**

Model Family #	Operation	Number of Faces	Letter Color	Face Color	Housing Color
HL0210NY	Blank - AC only	1 - Single Face	R - Red	BA - Brushed Aluminum	BA - Brushed Aluminum
	B - Battery Backup	2 - Double Face	G - Green	B - Black	B - Black
				W - White	W - White
Example model# HL0210 B 1 R W W					

Specifications subject to change without notice.



Exit Sign