

9/8/2011

**LED Exit/Incandescent Emergency Combo**

**Features**

- Energy-efficient LED technology in EXIT sign
- EZ snap-out chevron directional indicators
- Combines an EXIT sign & emergency light into one low-profile unit
- UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

**Electrical**

- Dual 120V/277V voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- 6V, 4.5Ah, sealed lead acid, maintenance-free, rechargeable battery
- Internal solid-state transfer switch automatically connects the internal battery to LED Board/lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

**Illumination**

- Standard with two 5.4 watt tungsten fully adjustable, glarefree incandescent emergency lighting heads
- High-performance smooth thermoplastic reflector and plastic lens for optimal light distribution
- Ultra bright, energy efficient, long-lasting Red or Green LED (exit sign illumination)

**Housing**

- Injection-molded, engineering-grade, V-0 flame retardant, high-impact, thermoplastic in white or black finish


Project:	
Catalog#:	
Approved by:	



**Mounting**

- Universal surface mount, wall or ceiling, with EZ-snap thermoplastic mounting canopy, which snaps into place making installation quick & easy.

**Dimensions**

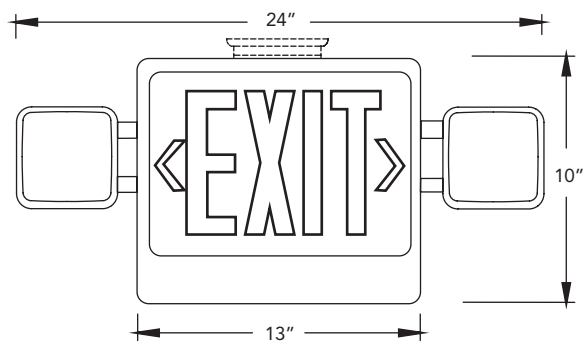

**ORDERING INFORMATION**

Model Family #	Number of Faces	Letter Color	Housing Color	Options
HL0214	3 - Universal	R - Red G - Green	B - Black W - White	RC - Remote Capable SDT - Self Diagnostic HTR - Internal Heater
Example model# HL0214 3 R W				

Specifications subject to change without notice.



Exit/Emergency Combo