

10/23/2012

**Compact Wet Location LED Exit Sign**

|              |  |
|--------------|--|
| Project:     |  |
| Catalog#:    |  |
| Approved by: |  |

**Features**

- UL listed for wet locations
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

**Electrical**

- Dual 120V/277V voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- Long-life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED Board for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

**Illumination**

- Ultra bright, energy efficient, long-lasting Red or Green LED (exit sign illumination)

**Housing**

- 5VA flame retardant, UV-stabilized polycarbonate in white, black ore grey finish.
- High-impact resistant, UV-stabilized polycarbonate clear lens
- Fully gasketed corrosion-resistant enclosure
- Engineering grade silicon gasket
- Knockouts provided for conduit feed applications
- EZ snap-out chevron directional indicators

**Mounting**


- Polycarbonate mounting canopy included for top or end mount
- Universal Knockout patter on back plate for wall mount



**Options**

- SDT: Self-diagnostic test feature continually diagnoses unit's performance and tests system to ensure reliable operation and to meet electrical and life safety codes
- 2C: Dual-circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- TP: Tamper-proof hardware helps prevent unauthorized access to the unit

**Dimensions**

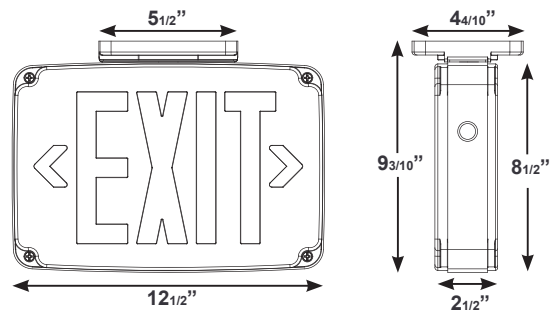

**ORDERING INFORMATION**

| Model Family # | Operation                             | No. of Faces                       | Letter Color         | Housing                            | Option   |
|----------------|---------------------------------------|------------------------------------|----------------------|------------------------------------|--|
| HL0225         | Blank - AC Only<br>B - Battery Backup | 1 - Single Face<br>2 - Double Face | R - Red<br>G - Green | W - White<br>B - Black<br>G - Grey | SDT - Self-diagnostic<br>2C - Dual-circuit*<br>TP - Tamper Proof |

Example model# HL0225B2RW

\* Dual-circuit is available with AC Only unit. Not available with Battery Backup unit.

Specifications subject to change without notice.



Exit Sign