

1/10/2013

Lightpipe LED Exit/Emergency Combo

Exit/Emergency Combo

Project:	
Catalog#:	
Approved by:	

Features

- Unique, design combines an energy-efficient LED EXIT sign with an LED emergency light into one low-profile unit.
- Wattage per face: 1.5W.
- UL listed for damp locations
- Meets UL924, NFPA, 101 Life Safety Code, NEC, OSHA, Local & State Codes
- EZ snap-out field selectable Chevron directional indicators.



Electrical

- Dual 120/277V; 0.47A max
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- Long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED Board/light pipe for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.


Mounting

- EZ-snap thermoplastic mounting canopy, included - for top, end or back mounting options.

Illumination

- Ultra-bright, energy efficient white LED emergency lighting.
- High-performance smooth chrome-plated metallized reflector and polycarbonate "light pipe" lens for optimal light distribution and resistance to discoloration.
- Adjustable light pipe allows for optimal use of light output.
- Long-lasting, energy efficient Red or Green LED exit sign.

Dimensions

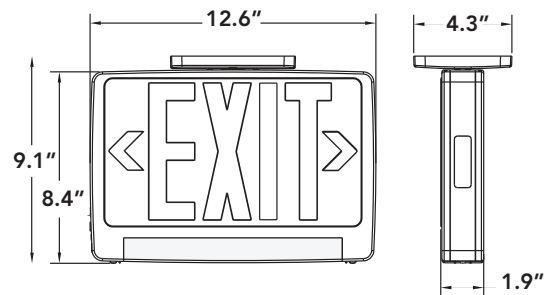

Housing

- Injection-molded, engineering-grade, V-0 flame retardant, high-impact, thermoplastic in white or black.

ORDERING INFORMATION

Model Family #	Number of Faces	Letter Color	Housing Color	Options
HL0330	1 - Single Face 2 - Double Face	R - Red G - Green	B - Black Powder Coated W - White Powder Coated	RC - Remote Capability SDT - Self-Diagnostic
example model# HL0330 2 R W				

Specifications subject to change without notice.