

5/22/2013

New York Approved LED Exit Sign

Project:	
Catalog#:	
Approved by:	

Features

- UL Listed for damp locations (20°C - 50°C)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

Electrical

- Dual 120V/277V voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 3.6V long-life, maintenance-free, rechargeable Ni-Cad battery
- Internal solid-state transfer switch automatically connects the internal battery to LEDs for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours

Typical Performance	Red	
	Input Voltage	120
Input Current (A)	0.041	0.018
Input Power (W)	5.0	5.0

Illumination

- Ultra-bright, energy efficient Red LED
- NY approved 8" EXIT letters

Housing


- Durable, powder-coated 20-gauge steel construction in white or black finish
- Unique design allows double face conversion in the field
- Field removable steel knockout Chevron directional indicators



Mounting

- Aluminum mounting canopy included for top or end mount
- Universal wall mounting knockout pattern on back plate
- Top and side knockouts provided for conduit feed applications

Dimensions

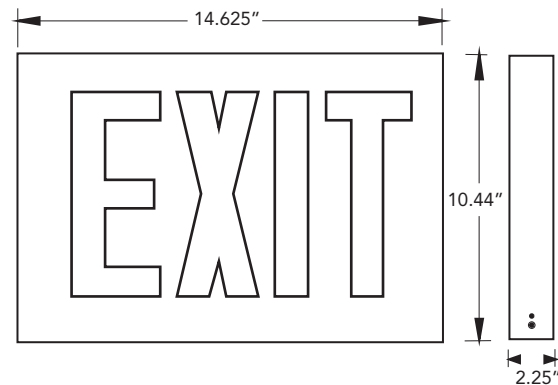

ORDERING INFORMATION

Model Family #	Number of Faces	Operation	Letter Color	Housing Color
HL0346NY	1 - Single Face	Blank - AC only	R - Red	B - Black
	2 - Double Face	B - Battery Backup		W - White Coated
example model# HL0346NY 1 B R W				

Specifications subject to change without notice.



Exit Sign