

1/26/2012

**Thermoplastic Combo LED**

**Features**

- Long life, energy saving LED lamps
- Remote capable option yields 12W extra capacity
- Injection-molded, high impact thermoplastic construction
- Snap-fit faceplate installs without the use of tools
- Field replacement chevron directional indicator knockouts
- Integral wiring channels to facilitate installation
- Universal mounting pattern knockout in back plate for J-box mounting
- Universal single face and double face (extra faceplate included)
- Snap-fit canopy (included) enables speedy top mounting
- Fully adjustable glare-free lighting heads, white housing is standard, with an optional black housing available
- Dual-voltage input 120V or 277V AC Operation
- Emergency unit provided with test switch, status indicator and rechargeable battery
- Maintenance-free, 6V sealed lead-acid battery, provides 90 minutes of emergency power
- Two 5.4W DC 5 wedge-base lamps for emergency light


**Electrical Information**

Typical Performance	Red/Green	
	Input Voltage	120
Input Current (mA)	62	29
Input Power (W)	6.8	7.2
Power Factor (%)	>0.9	>0.9
Current THD (%)	<20	<20

Project:	
Catalog#:	
Approved by:	



**Dimensions**

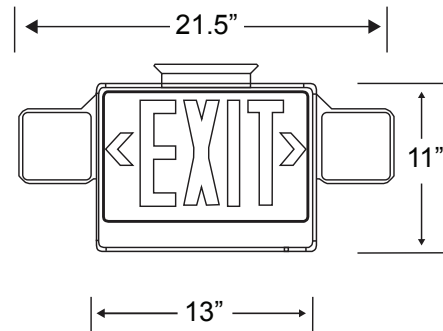

**ORDERING INFORMATION**

Model Family #	Number of Faces	Letter Color	Housing Color	Options
HL0409	3 -Universal Single/Double Face	R - Red G - Green	B - Black W - White Coated	Blank - no SDT or RC RC - Remote Capable SDT - Self Diagnostic Testing
example model# HL04093RWSD				

Specifications subject to change without notice.



Exit/Emergency Combo