

5/1/2013

Die Cast Aluminum LED Exit/Emergency Combo

Features

- Five year warranty on all electronics and housing. Battery pro-rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for damp locations. (0°C – 50°C)

Electrical

- Dual 120V/277V voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- Maintenance-free, rechargeable Ni-Cad battery is standard
- Internal solid-state transfer switch automatically connects the internal battery to LEDs and LED lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Catalog Number	Input Watts (W)		Input Amps (A)	
	120v	277v	120v	277v
HL0410 (Red or Green Letters)	4.6	4.8	0.053	0.024

Illumination

- Ultra-bright, energy efficient, long-life Red or Green LED
- High performance premium grade, ultra-bright white LED lamps.
- 3W (1 LED x 3 watts) per head

Housing

- First premium grade die-cast combo in the market. Unique new design provides spec-grade EXIT sign with LED lamp heads in one low-profile housing.
- Premium-grade, extruded aluminum housing (also available in black or white powder-coated finishes).
- Field selectable knockout Chevron directional indicators. Quick-snap face plate closure.
- Unique design allows double face conversion in the field.

Project:	
Catalog#:	
Approved by:	




Ultra bright LED emergency lighting heads

Mounting

- Aluminum mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

Dimensions

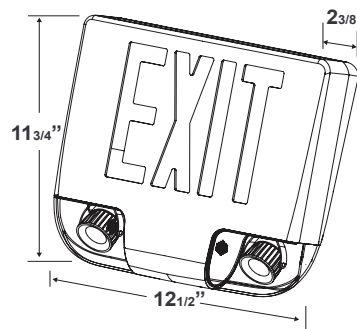

ORDERING INFORMATION

Model Family #	Number of Faces	Letter Color	Housing Color	Face Plate Color	Battery	Options
HL0410	1 - Single Face 2 - Double Face 3 -Universal Single/Double Face	R - Red G - Green	A - Aluminum B - Black W - White	A - Aluminum B - Black W - White	EM - Battery Backup (NiCad) (All units are Battery Backup)	Blank - no options RC - Remote Capable
example model# HL04102RAAEM						

Specifications subject to change without notice.



Exit/Emergency Combo