

**Decorative Outdoor LED  
AC/Emergency Light**

**Illumination**

- Long life, efficient, ultra bright white LED.
- 12W (2 LEDs x 6.0 watt) per unit.
- Mirror-bright reflector and prismatic polycarbonate refractor.
- Can be used as a Normally-ON or Normally-OFF light as well as on a switched circuit.
- Provides 1286 lumens in AC mode and 350 lumens in EM mode.

**Electrical**

- Universal 120-277VAC voltage.
- Charge rate/power "ON" LED indicator light and push-to test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Self-diagnostic test feature continually diagnoses unit performance and tests system to ensure reliable operation and to meet electrical and life safety codes.
- Field-selectable wiring allows for "AC" operation of the unit to be controlled using a wall switch, a photocell, or any other switching mechanism.
- Photocell sensor included as a standard for use as dusk-to-dawn light.

**Mounting**

- Surface mount via easy-connect back plate that fits most standard size junction boxes.
- Universal K/O pattern on back plate for wall mount.
- Threaded opening at the top of the enclosure for conduit mount.

**Housing**

- Decorative, Low Profile, architectural design.
- Die-cast aluminum housing.
- Durable powder-coated finishes in white, black, nickel and dark bronze.
- Sealed and gasketed.

Ordering Information		
Model Family	Housing Color	Options
<b>HLDBEL</b>	<b>B</b> - Black <b>W</b> - White <b>BR</b> - Dark Bronze <b>N</b> - Nickel	<b>CW</b> - Cold Weather

Project:	
Catalog#:	
Approved by:	
Date:	



Five year warranty on all electronics and housing. Battery pro rated for five years.


**Certifications**

- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for wet locations (0°C – 50°C).

**Options**

- CW: Optional internal heater for extreme cold temperature applications (-30°C – 50°C).

**Dimensions**

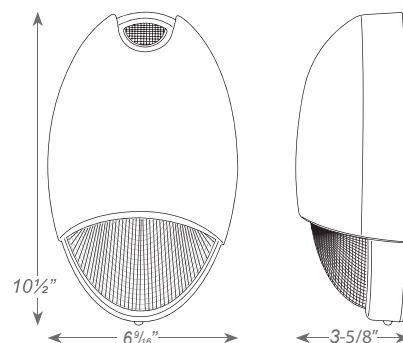

Sample Ordering Information

**Howard HLDBELB**  
12W  
120-277 volts  
Black Housing

