

9/8/2011

Emergency Light

**Recessed Emergency Downlighting
with Adjustable Gimbal Trim**

Project:	
Catalog#:	
Approved by:	

Features

- Recessed downlighting for emergency lighting applications
- Mounting bar hangers included for quick & easy installation
- UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

Electrical

- Dual 120V/277V voltage
- Isolating transformer
- Junction box with 3/4" knockouts for AC input
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 6V, 4.5Ah, sealed lead acid, maintenance-free, rechargeable battery
- Battery and circuit housing inside the unit
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours
- CCEA Plenum Rating Certified

Illumination

- Supplied with an 8W Bi-Pin Halogen lamp
- Custom PAR-36 size reflector and lens offer optimum emergency lighting
- Adjustable aiming angle

Housing


- Steel mounting frame and housing
- 6" recessed housing with mounting bar hangers
- Impact-resistant thermoplastic adjustable gimbal trim
- Trim attaches to housing with spring clips



Mounting

- Recessed ceiling mount with mounting bar hangers

Dimensions

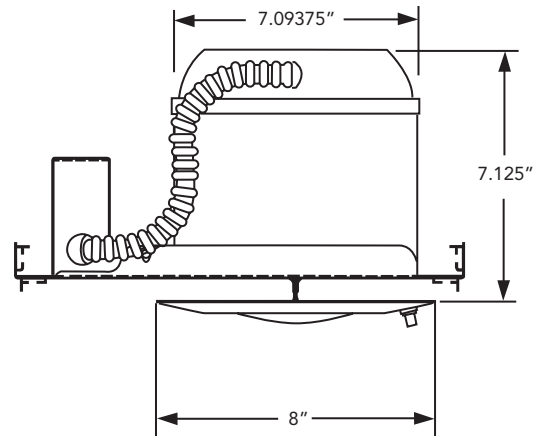

ORDERING INFORMATION

Model Family	Trim Color
HLEMRL-1	W - White
	B - Black
example model# HLEMRL-1 W	

Specifications subject to change without notice.

