

9/8/2011

Emergency Light

Wet Location Emergency Light

Project:	
Catalog#:	
Approved by:	

Features

- Polycarbonate housing provides resistance to corrosive and non-hazardous dust environments
- Remote Capable
- UL listed for wet locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

Electrical

- Dual 120V/277V voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 6V, 7.2Ah, sealed lead acid, maintenance-free, rechargeable battery
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours

Illumination

- Sealed and gasketed weather proof lighting heads with tempered glass lenses
- 6V, 7.2W incandescent wedge base lamps
- Provides 15W of remote capability

Housing


- Corrosion-resistant polycarbonate housing
- Sealed and gasketed housing with hinged cover
- Sealed test switch and power "ON" indicator light
- Integral breather vent



Mounting

- External mounting brackets for simplified wall mounting

Dimensions

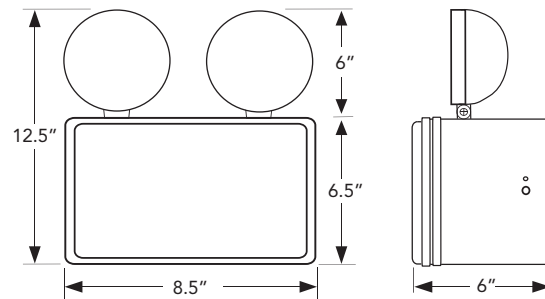

ORDERING INFORMATION

Catalog Number	Options	Finish	Output Voltage	Lamp Wattage	Emergency Operation
HLTFX-2		White	6V	2x7.2W	90 minutes
HLTFX-2-RC	RC - Remote Capable	White	6V	2x7.2W	90 minutes

example model# HLTFX-2

Specifications subject to change without notice.

