

5/2/2017

LIMITED QUANTITIES AVAILABLE

Mid-Size Wide Flood "Tenon Mount"

HPS / 50 - 150 watts | PS / 50 - 150 watts

Project:	
Catalog#:	
Approved by:	

Applications

Ideal for lighting building facades, displays, signs, landscapes, or for general security lighting purposes

Features

- Die-cast housing with hinged door frame for easy relamping (lamp included)
- Textured bronze finish with tempered glass lens and adjustable reflector and socket to allow horizontal or vertical lamp
- Slip fitter that fits 2 3/8" tenon
- Sturdy mounting system resists damage from lawn equipment and UL listed for wet locations
- EPA = 0.75 sq. ft.; Max. fixture weight = 15 lbs.




ORDERING INFORMATION

Catalog #	Watts	Volts †	Ballast	ANSI	Lamp Part #
MSWFT-50-HPS-120	50 HPS	120	R-NPF	S68	LU50/MED
MSWFT-100-HPS-4T	100 HPS	4T	HX-HPF	S54	LU100/MED
MSWFT-150-HPS-4T	150 HPS	4T	HX-HPF	S55	LU150/55/MED
MSWFT-50-MH-2T	50 PSMH	2T	HX-HPF	M110	MH50/U/MED
MSWFT-70-MH-4T	70 PSMH	4T	HX-HPF	M98	MH70/U/MED
MSWFT-100-MH-4T	100 PSMH	4T	HX-HPF	M90	MH100/U/MED
MSWFT-150-PS-4T	100 PSMH	4T	HX-HPF	M102	MH150/U/MED


ACCESSORIES (sold separately)

Catalog #	Description
MSFWG	Wire guard with stainless steel construction
MSFGS	Black powder-coat finished glare shield that can be reverse mounted to use as a back cutoff
MSFVG	Clear polycarbonate vandal guard

DIMENSIONS

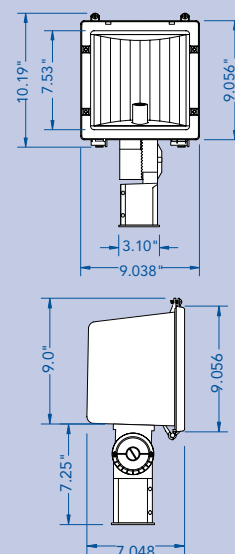


MOUNTING DETAIL



PHOTOMETRICS

150W PSMH @ 15' Mounting Height
& aimed 30° Below Horizontal

isofootcandles



† 2T = 120, 277 volts (pre-wired to 277)
4T = 120, 208, 240, 277 volts (pre-wired to 277)
120 = 120 volts

Specifications subject to change without notice.

