

5/1/2017

Limited Quantities Available

Round Back Flood

HPS / 70 - 150 watts | PS / 70 - 100 watts | MH / 175 watts

Applications

Great for lighting building facades, displays, signs, or for general security lighting purposes

Features

- Die-cast housing with hinged door frame for easy relamping (lamp included)
- Textured bronze finish with tempered glass lens
- Adjustable knuckle
- UL listed for wet locations
- EPA = 0.80 sq. ft.; Max. fixture weight =20 lbs.

Project:	
Catalog#:	
Approved by:	



HID/CFL Fixtures


ORDERING INFORMATION

Catalog #	Watts	Volts †	Ballast	ANSI	Lamp Part #
RBF-70-HPS-120	70 HPS	120	R-NPF	S62	LU70/MED
RBF-100-HPS-120	100 HPS	120	R-NPF	S54	LU100/MED
RBF-100-HPS-4T	100 HPS	4T	HX-HPF	S54	LU100/MED
RBF-150-HPS-4T	150 HPS	4T	HX-HPF	S55	LU150/55/MED
RBF-150-PS-4T	150 PSMH	4T	HX-HPF	M102	MH150/U/MED
RBF-100-MH-4T	100 PSMH	4T	HX-HPF	M90	MH100/U/MED
RBF-175-MH-4T	175 MH	4T	CWA	M57/E	MH175/U


ACCESSORIES (sold separately)

Catalog #	Description
RBFWG	Wire guard with stainless steel construction
RBFGS	Black powder-coat finished glare shield that can be reverse mounted to use as a back cutoff
RBFVG	Clear polycarbonate vandal guard
FLGSTK	HID ground stake with position adjustable stabilizer, die-cast fitting that accepts 1/2" knuckle, and built in wiring compartment

DIMENSIONS

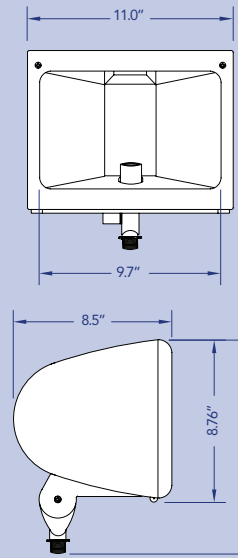


MOUNTING DETAIL



PHOTOMETRICS

175W MH @ 15' Mounting Height and aimed 30° Below Horizontal Isofootcandles



† 4T = 120, 208, 240, 277 volts (pre-wired to 277)
120 = 120 volts

Specifications subject to change without notice.

