

7/16/2013

T5 Fluorescent

Direct/Indirect

2ft: 24w T5HO

4ft: 54w T5HO

Lay-in Fluorescent



Applications

For use with NEMA 'G' standard 15/16" grid ceiling systems.

Benefits

- Energy Saving
- High System Efficacy
- Long Lamp Life
- Reflectors and ends feature special matte white paint to enhance efficiency

Features

- Housing: Die-formed heavy gauge cold rolled steel
- Basket options: Clear acrylic or Clear with overlay
- Finish: Low gloss, high reflectivity powder coat finish
- Mounting: Standard troffer mounting for T-bar ceilings
- Fluorescent Light Source: T5 or T5HO linear lamps

Project:	
Catalog#:	
Approved by:	


Description

An attractive center basket 2x2 or 2x4 direct/indirect fixture, the DI provides soft, balanced illumination for a contemporary appearance and comfortable, low glare light. The housing and T5 lamps are fully recessed above the ceiling pane, minimizing lamp exposure and glare.


The acrylic lens wraps around the T5 lamps to provide the ideal combination of efficiency and aesthetics. The curved reflectors produce a combination of direct and indirect light, fully illuminating the fixture housing.

The contoured panels of the unit are finished in high reflectance matte white that provide a low-brightness glow with the majority of the light controlled through the center.

DI Assembly

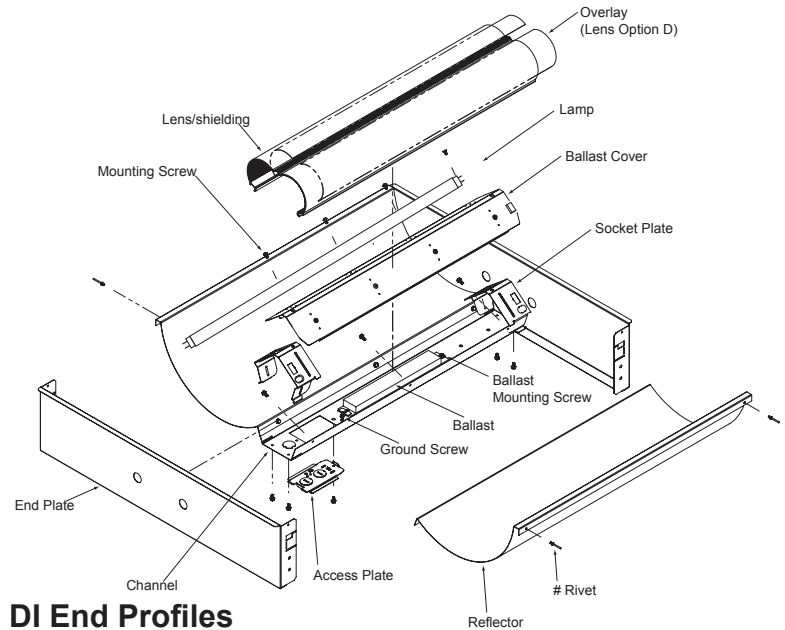

DI End Profiles

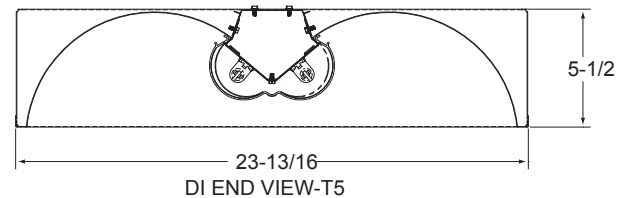

Specifications subject to change without notice.



7/16/2013

T5 Fluorescent

Direct/Indirect

2ft: 24w T5HO

4ft: 54w T5HO

Project:	
Catalog#:	
Approved by:	

Ordering Information

Model Family	Dimensions	Lens	# of Lamps	Wattage	CRI/CCT	Ballast Type	Voltage	Options	Cordset	Packaging
DI	22	D	2	24	H	PS	MV	000	00	I
Direct/Indirect Lay-in Troffer	22: 2x2	A: Acrylic Clear Lens D: Acrylic Clear Lens with Diffuse Overlay ¹	2: Lamps	24: F24T5/HO	A: No Lamp Installed H: 85CRI/4100K	PS: Program Rapid Start	MV: 120-277v	B: Emergency Ballast ²	00: Stand. Disconnect 13: 3' Flex Conduit 14: 6' Flex Conduit 15: 10' Flex Conduit	I: Individual
	24: 2x4			54: F54T5/HO						

(1) Overlay diffuser breaks up the image of the lamp for a clean, even look.
 (2) Please specify Emergency Ballast (120-277v only) lumen requirements at time of request. Available with 2x4 style only.

Sample Ordering Number:
DI22 D 2 24HPSMV 000 00 I
 DI Series Direct/Indirect
 2ft. x 2ft.
 With Clear Acrylic Lens with Diffuse Overlay
 2 Lamp 24W T5 (F24T5/841/HO) lamps included
 Program Rapid Start Multi-volt Ballast
 Standard Disconnect
 Individual Package

Specifications subject to change without notice.