

10/2/2013

**T5 Fluorescent**  
Recessed Low Profile  
2ft: 24w T5HO  
4ft: 54w T5HO



**Applications**

For use with NEMA 'G' standard 15/16" grid ceiling systems.

**Benefits**

- Energy Saving
- High System Efficacy
- Long Lamp Life
- Linear ribbed acrylic lens with diffuser overlay manages the balance of efficiency and aesthetics.
- Reflector distributes light through both optical elements.

**Features**

- Housing: Low profile body with matte white sloped side members
- Diffuser Surround: Linear ribbed acrylic lens with diffuser overlay
- Reflector: High reflectance white reflector
- Luminaire Type: Recessed troffer fixture body assembly 2'x2' and 2'x4' size.
- Fluorescent: T5HO operation
- Grid patten decorative insert included
- cULus Listed

Specifications subject to change without notice.



Project:	
Catalog#:	
Approved by:	

**Description**

The LP offers subtle soft direct elements, interest, and depth across the ceiling plane with a contemporary look that blends with today's commercial spaces.

The extruded acrylic lens with softening overlay provides a low-brightness glow with the effective combination of excellent light transmission and effective lamp obscurity.

**LP Assembly**

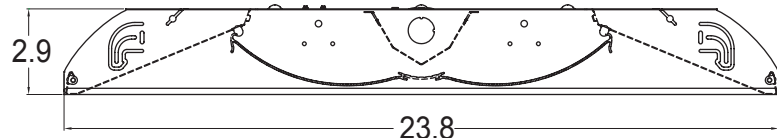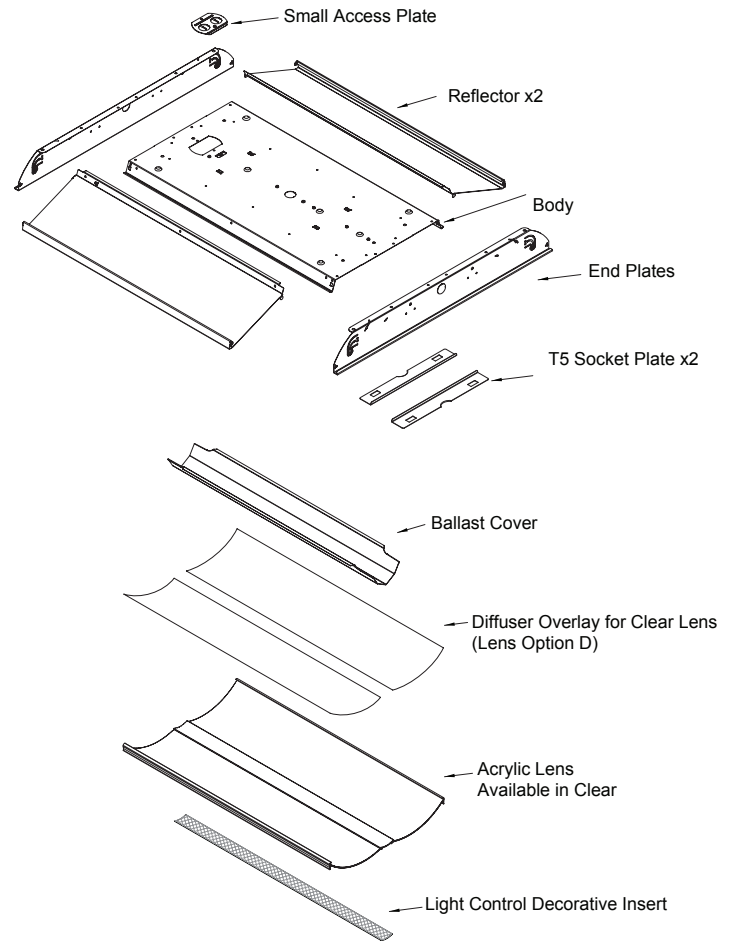

LP - End Profile

Lay-in Fluorescent

10/2/2013

**T5 Fluorescent**  
Recessed Low Profile  
2ft: 24w T5HO  
4ft: 54w T5HO

Project:	
Catalog#:	
Approved by:	

**Ordering Information**

Model Family	Dimensions	Lens	# of Lamps	Wattage	CRI/CCT	Ballast Type	Voltage	Factory Installed Options	Cordset	Packaging
LP	22	D	2	24	H	PS	MV	000	00	I
Recessed Low Profile Lay-in Troffer	22: 2x2	A: Acrylic Clear Lens D: Acrylic Clear Lens with Diffuse Overlay <sup>1</sup>	2: Lamps	24: F24T5/HO	A: No Lamp Installed H: 85CRI/4100K	PS: Program Rapid Start	MV: 120-277v	B: Emergency Ballast <sup>2</sup>	00: Stand. Disconnect 13: 3' Flex Conduit 14: 6' Flex Conduit 15: 10' Flex Conduit	I: Individual
	24: 2x4			54: F54T5/HO						

(1) Overlay diffuser breaks up the image of the lamp for a clean, even look.  
(2) Please specify Emergency Ballast (120-277v only) lumen requirements at time of request. Available with 2x4 style only.

**Sample Ordering Number:**  
LP22D 2 24HPSMV 000 00 I  
LP Series Recessed Low Profile  
2ft. x 2ft.  
With Clear Acrylic Lens with Diffuse Overlay  
2 Lamp 24W T5 (F24T5/841/HO) lamps included  
Program Rapid Start Multi-volt Ballast  
Standard Disconnect  
Individual Package

Specifications subject to change without notice.