



1/17/2012

T8 Linear Fluorescent Lamp
17 Watt / 83 CRI / 3000K

| | |
|--------------|--|
| Project: | |
| Catalog#: | |
| Approved by: | |

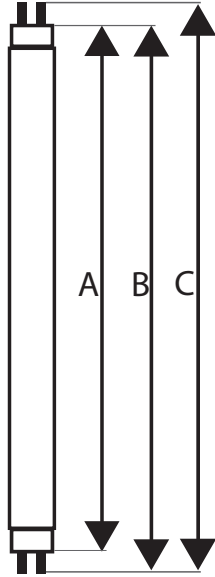

| Ordering Information | |
|---|-----------------------------------|
| Howard Catalog Number (Ordering Code) | F17T8/830 |
| UPC Code | 02243 |
| Description | T8 Low Mercury Linear Fluorescent |
| Package Quantity | 25 |
| Physical Characteristics | |
| Base | Medium Bipin |
| Bulb Type | T8 (8/8 inch) |
| Bulb Description | Tubular Fluorescent Lamp |
| Nominal Length (in) | 24 |
| Base face to base face (Amax) (in) | 23.61 |
| Base face to end of opposite base pin (Bmin/Bmax) (in) | 23.70/23.89 |
| End of base pin to end of the opposite pin end (Cmin/Cmax) (in) | 23.84/23.89 |
| Operating Characteristics | |
| Nominal Wattage | 17 |
| Approximate Initial Lumen (lm) | 1400 |
| Approximate Mean Lumen (lm) | 1275 |
| Average Rated Life (hours) | 24000 |
| Color Temperature (K) | 3000 |
| Color Rendering Index (CRI) | 83 |

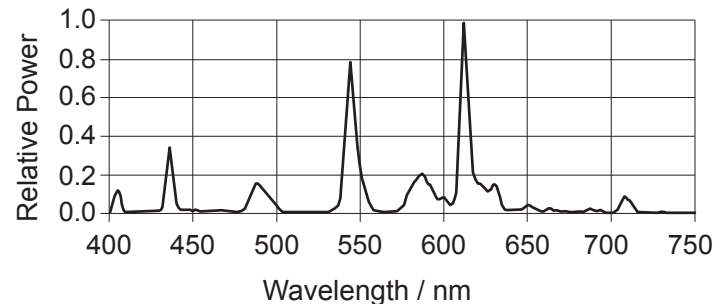

Note: Rated lamp life is 24,000 hours based on 3 hours per start and 30,000 hours based on 12 hours per start. Lamp life will be affected when using occupancy sensors, dimmers, or dimming systems. These products are Low-Mercury fluorescent lamps and pass the Federal TCLP for hazardous waste. Disposal regulations may vary; check local and state regulations. Specifications subject to change.

Specifications subject to change without notice.