


9/4/2013

Self Ballasted Compact Fluorescent Lamp

23 Watt T2 Self Ballasted CFL


Project:	
Catalog#:	
Approved by:	

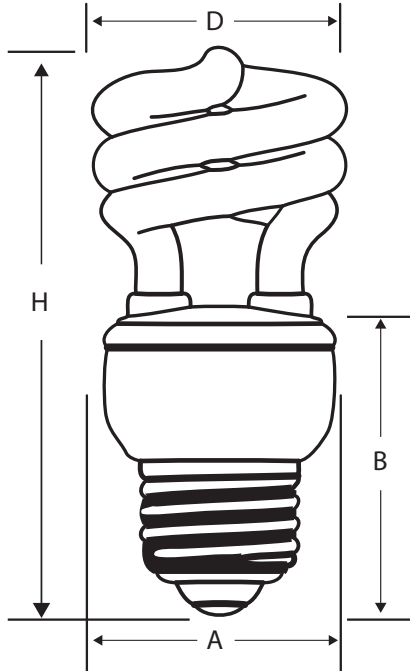


Ordering Information	
Howard Catalog Number (Ordering Code)	CF23MS/841
UPC Code	799385-01970
Description	T2 Self Ballasted CFL
Package Quantity	48
Physical Characteristics	
Base	Medium (ED26)
H: MOL (Maximum Overall Length) (in.)	4.33"
D: Diameter (in.)	2.44"
A: Base Width (in.)	1.93"
B: Base Height (in.)	2.46"
Operating Characteristics	
Lamp Watts (Nominal)	23
Approx. Initial Lumens	1600
Incandescent Equivalent	100
Average Rated Life (Hours)	10,000
Color Temperature (K)	4100
CRI (Color Rendering Index)	>80
Voltage	110-130v
Power Factor	>0.5
Operating Position	
	Universal

Lighting Facts <small>Per Bulb</small>	
Brightness	1600 lumens
Estimated Yearly Energy Cost	\$2.77
<small>Based on 3 hrs/day, 11¢/kWh Cost depends on rates and use</small>	
Life	9.1 years
<small>Based on 3 hrs/day</small>	
Light Appearance	
<div style="display: flex; justify-content: space-between; align-items: center;"> Warm Cool </div> <div style="text-align: center; margin-top: 5px;"> <p>4100 K</p> </div>	
Energy Used	23 watts
Contains Mercury	
<small>For more information on clean up and safe disposal, visit www.epa.gov/cfl</small>	

Typical Fluorescent Lamp Mortality

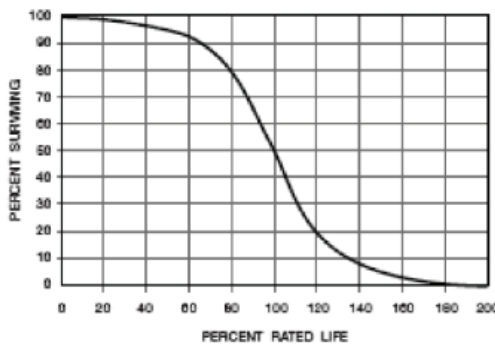

Lumen Maintenance Curve

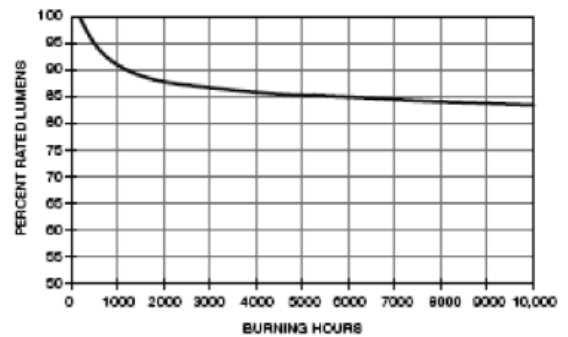

Note:

- Self ballasted CFL lamps cannot be installed on dimming circuits.
- Do not use in emergency exit fixtures or lights.
- For outdoor applications use only in enclosed fixtures to avoid exposure to weather.
- Do not use on electronic timers, photocells, lighted switches or any other switches that do not meet UL20 Sec. 7.6.15.
- Meets, FCC, CUL, UL and CE requirements.
- Install and remove lamp from fixture grasping plastic base.
- Use only 120v AC, 60Hz circuit.
- Never disassemble or modify lamp.
- Fully enclosed or recessed fixtures must contain proper ventilation.
- Best performance achieved when operated at 77°F/25°C.
- This product may cause interference with radios, cordless phones, televisions, and remote controls. If interferences occur, move this product away from the device and plug into a different outlet.
- Lamps contain mercury, dispose in accordance with local and state regulations.
- Warranty, this bulb is warranted for one year from date of purchase.
- Specifications subject to change. Actual results may vary.



Self Ballasted Compact Fluorescent Lamps