

10/24/2012

Adjustable Optics Thermoplastic LED Emergency Light

Project:	
Catalog#:	
Approved by:	

Features

- Compact, low-profile design in neutral finish
- UL Listed for damp locations
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes

Electrical

- Dual 120V/277V voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- Long-life, maintenance free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Input:

Volts	Wattage	Current
120V	1.8W	0.022A
277V	1.8W	0.010A

Illumination

- Long lasting, efficiency ultra-bright white LED lamp heads.
- High-performance chrome-plated metalized reflector and plastic lens for optimal light distribution
- Adjustable LED lamp heads provide optimal center-to-center spacing. High-lumen option available for increased center-to-center spacing.




Housing

- Injection-molded, engineering-grade, 5VA flame retardant, high-impact, thermoplastic in white or black finish

Mounting

- Surface mount via quick-connect back plate; fits most standard size junction boxes and snaps into place to make internal electrical connections.
- Conduit mount knocked on top of housing and back plate.
- Suitable for wall or ceiling mount.

Dimensions

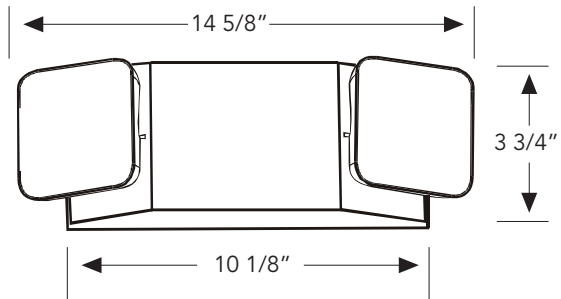

ORDERING INFORMATION

Model Family	Color	Options
HL0202L	W - White B - Black	Blank - None 1SD - Self Diagnostic HL - High Lumen
example model# HL0202LW		

Specifications subject to change without notice.



Emergency Light